


# charge

## PUBLIC SERIES



148.5 mm

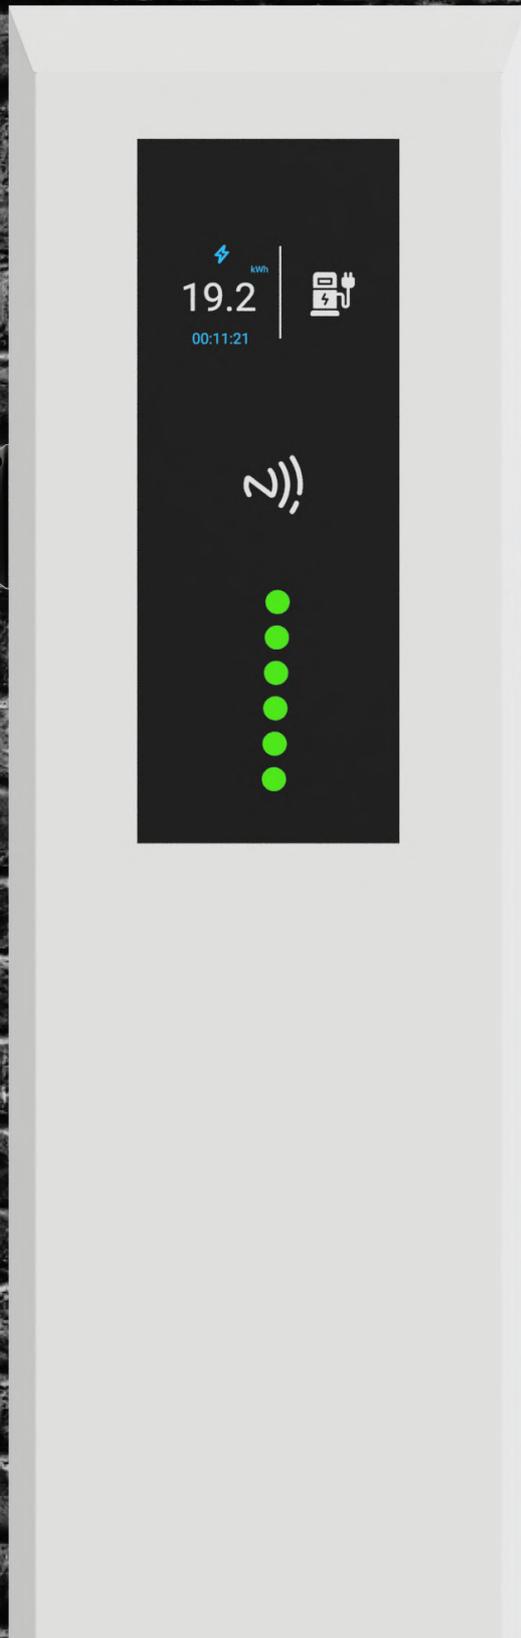

1535mm

343 mm

### **Charge Controller**

IEC 61851-1 (mode 3 charging)

Control Pilot and Proximity

Pilot communication

7" LCD

### **Power management**

Smart power measurement ( 3 + 1)

Dynamic load management DLM

6mA DC fault current detection

### **Connectivity hub**

Bluetooth 5.0 / WiFi

4G / LTE / LTE-NB

RFID / NFC

MODBUS, CAN, UART, USB


OCPP 1.6 / 2.0

### **Load Balancing**

Power queuing


Priority Load Balancing

Static load balancing

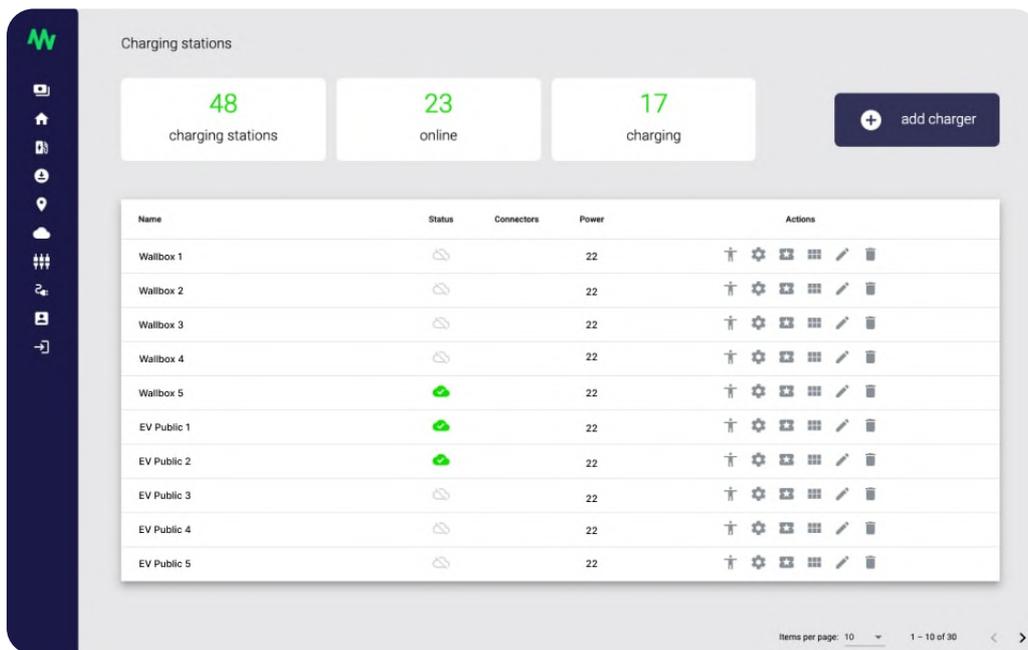

## ⚡ Control at your fingertips

- Real time power consumption
- Balancing power in real-time
- Power consumption analytics
- Create load balancing groups
- Charging session statistics by device and users
- Advanced user management
- Complete transaction management and analytics

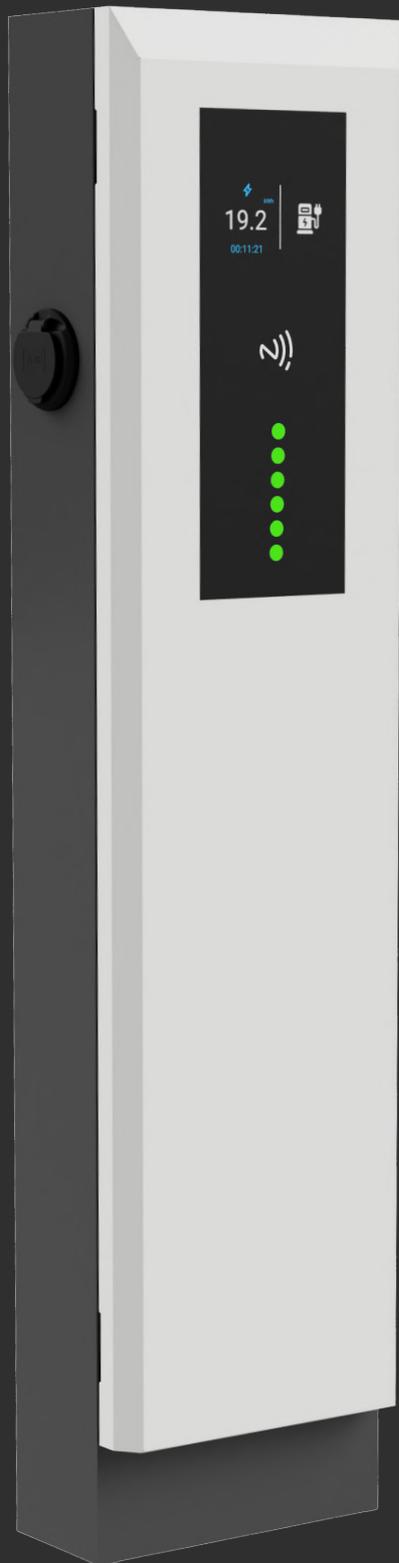

**2x 22kwh socket connectors**

**Integrated residual current detection: DC 6mA**

**Static and Dynamic load balancing**

**Smart Intergrated (3+1) or Class 1 MID energy meter**

**7" integrated screen**

**Mobile phone QR payments**

**Stainless steel, Multiple color options available.**